


Safety Back Film

300mm x 100m x 60 micron	D0031
600mm x 100m x 60 micron	D0032

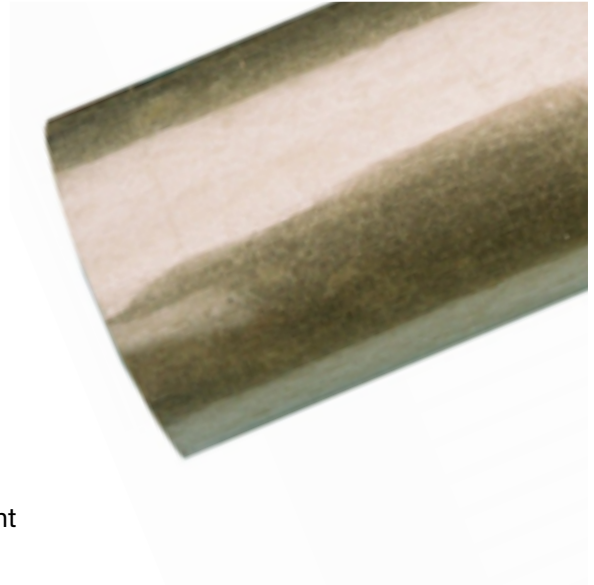

TECHNICAL DATA

TYPICAL APPLICATIONS

Applied to mirror doors to prevent injury from glass shards in the event of breakage.

ADVANTAGES AND BENEFITS

- May be applied by hand or with automated laminating equipment
- Liner-less
- Excellent adhesion to mirror backing paints
- Adheres and may be applied in vast temperature ranges and humidity levels

CONSTRUCTION

Overall Grade/Function: Self-wound, Mirror Backing Tape

Backing: 58 micron, biaxially oriented, cast polypropylene film

Adhesive: Water-based acrylic adhesive

COLOR(S)



Clear (CLR)

TRANSPRO 60 micron OPP Film - Ref SP/60/TP

PHYSICAL PROPERTIES

PROPERTY	STANDARD	METRIC
Tensile Strength	36.0 lbs/in width	63.0 N/10 mm
Adhesion to Stainless Steel	21.8 oz/in width	2.4 N/10 mm
Thickness	3.3 mils	0.08 mm
Elongation	272%	272%
Service Temperature Range	-2°F to 180°F	-29°C to 82°C
Application Temperature Range	20°F to 110°F	-7°C to 43°C

Physical and performance characteristics shown above are obtained from recommended tests by various agencies. They do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

APPLICABLE STANDARDS

FDA Indirect Contact CFR 21, B, 175.105

STORAGE & USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of the shipment date. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.