




Countersunk Fixed Bolt For 15 - 22mm Thick Glass (Model: KSP.V2001-1522-1465)

These items are not held in stock and will require approximately 1-2 weeks delivery time

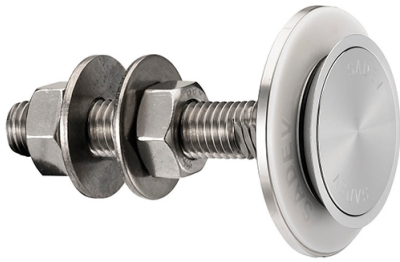

Attributes:

Product Code: KSP.V2001-1522-1465

Unit Of Sale: Each

Components

MARK	QUANTITY	DESCRIPTION	REF.
1	1	Body	X2 O/N M6 17-12,2 as per EN 10088-3
2	1	Threaded side	A4
3	1	Clamp hole groove	AW 1005A as per EN 873-3 / A4-70
4	1	Contact washer	White polyamide / white polyethylene
5	1	Clamp nut 3025	X2 O/N M6 17-12,2 as per EN 10088-3
6	1	Nut DIN 204	A4
7	1	Washer	A4
8	1	Lock washer 127	A4
9	1	Nut DIN 204	A4
10	1	3025 Cap Nut - Option	X2 O/N M6 17-12,2 as per EN 10088-3
11	1	More Cap Nut - Option	X2 O/N M6 17-12,2 as per EN 10088-3

Glass Drilling

Monolithic glass

Laminated glass
V = 1" glass + intercalated films + 2" glass

Available for glass thicknesses from 8 to 21.52mm, for other thicknesses please consult us.

It is important to provide the following information with each request: the glass composition (ex: 10mm monolithic, 8,8-4 laminated, 8,8-2-10-10 laminated); the length and diameter of the threaded side if not standard dimensions (M14, G1mm); the reference of the spider to be used as support; or the thickness of an existing support for the delivery of the spacer.

Mechanical Performance

Glass Type	Bending capacity		Pull out capacity
	ULS*	ULS**	
M12	65 mm 127 daN (285 lb)	269 daN (604 lb)	ULS*
90	95 daN (148 lb)	147 daN (330 lb)	ULS**
L14	95 mm 317 daN (712 lb)	838 daN (1898 lb)	4859 daN (11148 lb)
90	144 daN (323 lb)	313 daN (703 lb)	(11148 lb)

*ULS: Ultimate Limit State - load at the ultimate limit (EN 10111)
**ULS: Ultimate Limit State - load at the elastic limit (EN 10111)
Values are given without factor of safety

