



GRABO Replacement Standard Foam Seal (Model: B0007.SEAL)



- The standard replacement seal for both the Grabo Pro and Grabo Plus.


- We recommend changing your Grabo seal at least every six months or sooner with heavy use.

- Leaves no marks

Attributes:

Product Code: B0007.SEAL

Unit Of Sale: Each

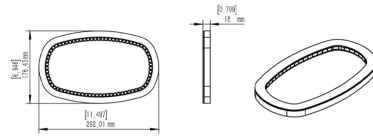

Lifting Capacity:

	Material	Glass	Ceramic Tiles	Metal	Plastic	Wood	Rough Slate	Rough Concrete	Dry Wall
Direction									
Perpendicular Hold		375lbs (170 kg)	375lbs (170 kg)	242lbs (110 kg)	220lbs (100 kg)	220lbs (100 kg)	176lbs (80 kg)	176lbs (80 kg)	165lbs (75 kg)
		260lbs (120 kg)	260lbs (120 kg)	242lbs (110 kg)	220lbs (100 kg)	143lbs (65 kg)	176lbs (80 kg)	176lbs (80 kg)	143lbs (65 kg)

Specifications:

Black foam seal	
Material	SBR rubber foam sponge
Color	Black
L x W x H	11.5 x 6.9 x 0.7" (293 x 175 x 19 mm)
Density	10.6 Lb/cft (170 kg/m ³)
Hardness, Shore C	-10 +/-2
Tearing Pressure	1800 Psi (126 kg/cm ²)
Compression to 25% size at	8.5 Psi (600 kg/m ²)
Water Absorption, %	<=5
Shrinkage at 160F (70C) for 24 hrs, %	<=20
Recommended Storage Temperature	Room temperature
Red seal	
Material	Silicon Foam
Color	Red
Density	40.5 Lb/cft (650 kg/m ³)
Hardness, Shore C	55 +/-5
Water Absorption, %	<=4
Recommended Storage Temperature	Room temperature