




60mm Dia. Flat Head Fixed Bolt For 22 - 26mm Thick Glass (Model: KSP.V2005-2226-1266)

These items are not held in stock and will require approximately 1-2 weeks delivery time

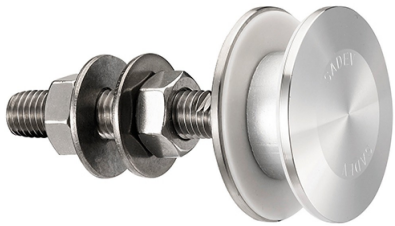


Attributes:


Product Code: KSP.V2005-2226-1266

Unit Of Sale: Each

Dimensions



Components



MARK	QUANTITY	DESCRIPTION	MATERIAL
1	1	Body	IG CR Ni Mo 17.12.2 as per EN 10088-3
2	1	Threaded pin	Al
3	1	Glass hole general	AW 1050A as per EN 573-3 / AS 6633
4	2	Conical washer	White anodized / white phosphated
5	1	Glass nut 01 00	IG CR Ni Mo 17.12.2 as per EN 10088-3
6	1	Nut DIN 934	Al
7	2	Washer	Al
8	1	Lock-washer 027	Al
9	1	Nut DIN 934	Al
10	1	3025 Cap Nut - Option	IG CR Ni Mo 17.12.2 as per EN 10088-3
11	1	Morel Cap Nut - Option	IG CR Ni Mo 17.12.2 as per EN 10088-3


Glass Drilling

Monolithic glass



Laminated glass


$V = 1^{\text{st}}$ glass + intercalated film + 2^{nd} glass



Available for glass thicknesses from 8 to 31,52mm, for other thicknesses please contact us.

It is important to provide the following information with each request: the glass composition (ex.: 10mm monolithic, 8.8.4 laminated, 8.8.2-10-10 laminated), the length and diameter of the threaded hole and its directional dimensions (M14, 60mm) / the reference of the spider to be used as support, or the thickness of an existing support for the diameter of the spider.

Mechanical Performance



D	Bonding capacity		Partial capacity	
	ULS	ULS	ULS	ULS
60 mm	137 daN (308 lb)	200 daN (450 lb)		
60 mm	85 daN (190 lb)	147 daN (330 lb)		
45 mm	217 daN (490 lb)	324 daN (730 lb)	638 daN	
60 mm	144 daN (325 lb)	313 daN (700 lb)		1148 lb

*ULS: Ultimate Limit State - Load at 10mm deflection
 *ULS: Ultimate Limit State - Load at the ultimate limit (90%)
 Values are given without factor of safety