



GRABO Replacement Brace Seal (Model: B0007.BRACESEAL)



- The Brace Seal is an additional seal for the GRABO specifically designed for glass under 6mm and other thin materials.
- The brace prevents material from getting pulled or sucked into the GRABO
- Ideal for glass under 6mm
- Strong Grip
- Can be used on all Grabo models



Attributes:

Product Code: B0007.BRACESEAL

Unit Of Sale: Each






Specifications:

Black foam seal

Material	SBR rubber foam sponge
Color	Black
L x W x H	11.5 x 6.9 x 0.53" (292.5 x 175.5 x 13.5 mm)
Working temperature	32°F--140°F (0°C--60 °C)
Density	10.6 Lb/cft (170 kg/m ³)
Hardness, Shore C	--10 +/-2
Tearing Pressure	1800 Psi (126 kg/cm ²)
Compression to 25% size at	8.5 Psi (6000 kg/m ²)
Lifetime (Compressions till performance reduction).	--900
Water Absorption, %	<=5
Shrinkage at 160F (70C) for 24 hrs, %	<=20
Recommended Storage Temperature	Room temperature
Applicable Surface Type	Smooth thin material (≤4mm)

Red brace

Material	Silicon
Color	Red
Density	40.5 Lb/cft (650 kg/m ³)
Hardness, Shore C	55 +/-5
Water Absorption, %	<=4
Recommended Storage Temperature	Room temperature

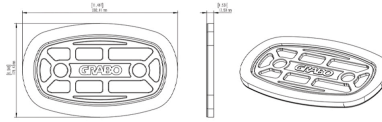

Lifting Capacity:

	Material	Glass	Metal	Wood	Rough Concrete
Direction					
Perpendicular Hold		375Lbs (170 kg)	308Lbs (140 kg)	220Lbs (100 kg)	176Lbs (80 kg)
Parallel Hold		265Lbs (120 kg)	198Lbs (90 kg)	143Lbs (65 kg)	176Lbs (80 kg)